

Cloud Easy smart PoE switch

WI-PCES306G| WI-PCES310GF| WI-PCES318GF|
WI-PCES326GF



Hardware Version: V2.0

Overview

Wi-Tek Cloud Easy smart PoE switch provides simple, safe, and easy-to-use local WEB and remote management methods and supports smart deployment, abnormal alarm, ONVIF automatic identification of network cameras, automatic shutdown of loop ports, etc. Users can easily use it without professional IT operation and maintenance. Wi-Tek Cloud Easy Smart PoE Switch is the best choice for CCTV and SMB network solution.

Features

Support Wi-Tek cloud management

ONVIF cameras and Wi-Tek cloud management devices can be remotely managed through Wi-Tek cloud platform/mobile APP, making CCTV network projects truly intelligent and easy to maintain. You can easily access and manage your cameras from your phone or computer anytime, anywhere.

(Note: The EWEB channel can be created only when the easy smart switch is linked with the other type of Wi-Tek cloud management device, such as cloud L2, L3 management switch, gateway, wireless AP, etc.)

Automatic Loop Prevention

By default, the switch enables port loop detection. When a loop occurs on the switch, the port which caused the loop will be closed in time to enable the switch to operate properly and maintain service continuity.

Remote Configuration

No need to go to the site to configure. Users can make some remote configurations such as port restart, PoE restart, VLAN division, and even maintenance and debugging can be done remotely anytime and anywhere.

Intelligent Operation and Maintenance

Abnormal alarm can help you locate problems quickly, making your operation and maintenance easier.

Specifications



Model	WI-PCES306G	WI-PCES310GF	WI-PCES318GF	WI-PCES326GF
Hardware Features				
Interfaces				
Downlink Ports	4*10/100/1000 BASE-T RJ45 ports	8*10/100/1000 BASE-T RJ45 ports	16*10/100/1000 BASE-T RJ45 ports	24*10/100/1000 BASE-T RJ45 ports
Uplink Ports	2*10/100/1000Mbps BASE-T RJ45 ports	2*1000Mbps SFP Slots	2*1000Mbps SFP Slots	2*1000Mbps SFP Slots
PoE				
PoE Port	Port 1–4: 802.3af/at PoE Ports	Port 1–8: 802.3af/at PoE Ports	Port 1–16: 802.3af/at PoE Ports	Port 1–24: 802.3af/at PoE Ports
PoE Standard	802.3af/at			
PoE Power Supply Type	End-span			
PoE Pin Assignment	1/2(+), 3/6(–)			
PoE Power	30W Max. for each port, 60W Max. for PoE power budget	30W Max. for each port, 120W Max. for PoE power budget	30W Max. for each port, 240W Max. for PoE power budget	30W Max. for each port, 370W Max. for PoE power budget
Performance				
Memory and Flash	Memory: 128K DDR3 Flash: 16MB			
Switch Property				
Standards and Protocols	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.1x, IEEE 802.1q, IEEE802.1p, IEEE802.3af, IEEE802.3at	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.1x, IEEE 802.1q, IEEE 802.1p, IEEE802.3af, IEEE802.3at	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.1x, IEEE802.1q, IEEE802.1p, IEEE802.3af, IEEE802.3at	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.1x, IEEE802.1q, IEEE 802.1p, IEEE802.3af, IEEE802.3at
Forwarding Mode	Store and Forward			
Switching Capacity	12 Gbps	20 Gbps	36 Gbps	52 Gbps
Packet Forwarding Rate	8.93 Mpps	14.88 Mpps	26.78 Mpps	38.68 Mpps



Model	WI-PCES306G		WI-PCES310GF		WI-PCES318GF		WI-PCES326GF	
MAC Address Table	8k							
Packet Buffer Memory	4.1Mbit							
Jumbo Frame	9 kB							
Power Supply								
Input Power	AC 100–240V, 50/60Hz							
Power Consumption	Idle: 5W	Idle: 10W	Idle: 10W	Idle: 12W				
	100% Traffic Rate with PoE: 65 W	100% Traffic Rate with PoE: 130 W	100% Traffic Rate with PoE: 250 W	100% Traffic Rate with PoE: 382 W				
Physical Characteristics								
LED Indicators	PWR Indicator: On: the device power on is normal Off: the device is power off or failed		PWR Indicator: On: the device power on is normal Off: the device is power off or failed					
	Link Indicator: Off: No device is connected to the corresponding port. On: Indicates the link through that port is successfully established		Link Indicator: Off: No device is connected to the corresponding port. On: Indicates the link through that port is successfully established					
	Blinking: Indicates that the Switch is actively sending or receiving data over that port.		Blinking: Indicates that the Switch is actively sending or receiving data over that port.					
	PoE Indicator: Off: No PoE powered device (PD) connected. On: There is a PoE PD connected to be port, which supply power successfully.		PoE Indicator: Off: No PoE powered device (PD) connected. On: There is a PoE PD connected to be port, which supply power successfully.					
	Blinking: Indicates the port is abnormal.		Blinking: Indicates the port is abnormal.					
Buttons	Hold for >5 sec. to restore factory default.							
Fan Quantity	Fanless	1	2	2				
Dimensions (W*D*H)	168*94*32mm	220*150*44mm	440*207*44mm	440*207*44mm				
Weight	Net Weight: 0.52kg	Net Weight: 1.24kg	Net Weight: 2.4kg	Net Weight: 2.78kg				
	Package Weight: 0.83kg	Package Weight: 1.84kg	Package Weight: 3.09kg	Package Weight: 3.46kg				
Installation	Desktop	Rack–Mounted	Rack–Mounted	Rack–Mounted				




Model		WI-PCES306G	WI-PCES310GF	WI-PCES318GF	WI-PCES326GF
Environmental					
Reliability	Surge Immunity	Common mode ±4kV Differential mode ±2kV			
	ESD Protection	Contact discharge ±6kV Air discharge ±8kV			
Operating Temperature		-10 °C ~ 50°C(14°F ~ 122°F)			
Storage Temperature		-40°C ~ 70 °C(-40°F ~ 158°F)			
Operating Humidity		10% ~ 90% RH no condensation			
Storage Humidity		5 ~ 90% RH non-condensing			
Certification					
Certification		CE, FCC, RoHS, UKCA, RCM			



Model		WI-PCES306G	WI-PCES310GF	WI-PCES318GF	WI-PCES326GF
Software Features					
Switch Settings	IP Settings				
	User Management				
	Firmware Upgrade				
	Reset				
	Reboot				
Monitoring	Port Statistics				
	Cable Diagnostics				
	Loop Guard				
	Ping Test				
Switch Settings	Port Mirroring				
	Port Isolation				
	Port Reboot				
	Jumbo Frame				
	Static MAC				
	Filter MAC				
	Search MAC				
	MAC List				
	DHCP Snooping				
QoS	Port Rate				
	Storm Control				
	Port/802.1p/DSCP priority				
VLAN Settings	Port-based VLAN				
	VLAN Range: 1–4094				
PoE Settings	PoE port disable				
	PD Alive				
	Extend PoE				
ONVIF	Automatically identify IP cameras that support ONVIF				
Wi-Tek Cloud manage	Cloud management and APP management				

WI-PCES306G

Dimensions (mm)

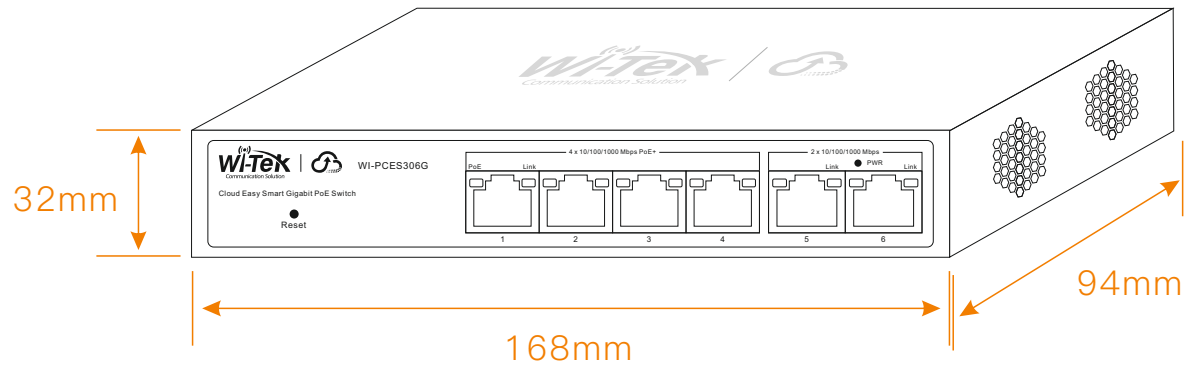


Front Panel



- Reset Button
- 4*10/100/1000 BASE-T RJ45 PoE+ ports
- 2*10/100/1000Mbps BASE-T RJ45 ports


Side Panel



- Grounding
- AC 100~240V Power Port



WI-PCES310GF

Dimensions (mm)

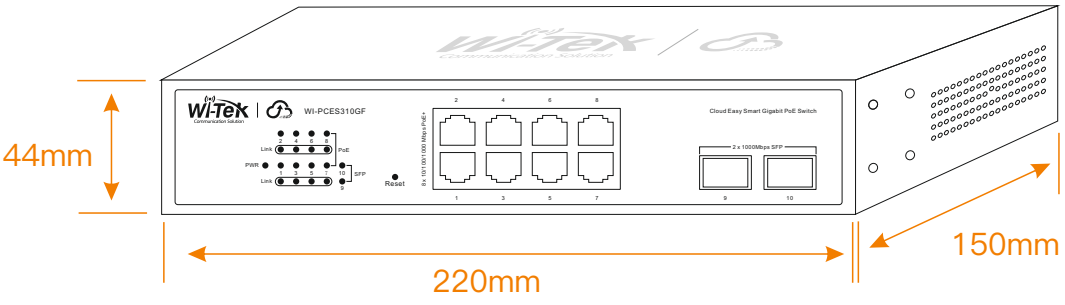


Front Panel

Side Panel

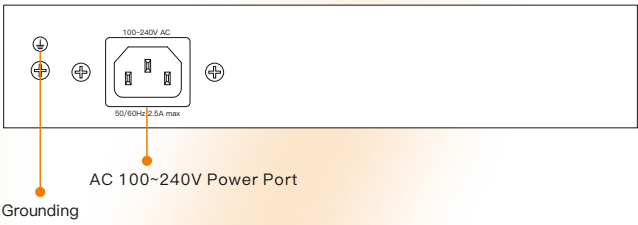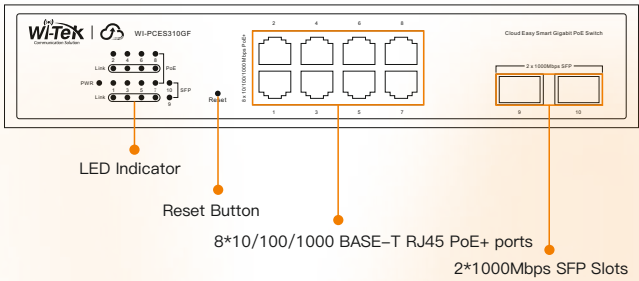


WI-PCES318GF


Dimensions (mm)

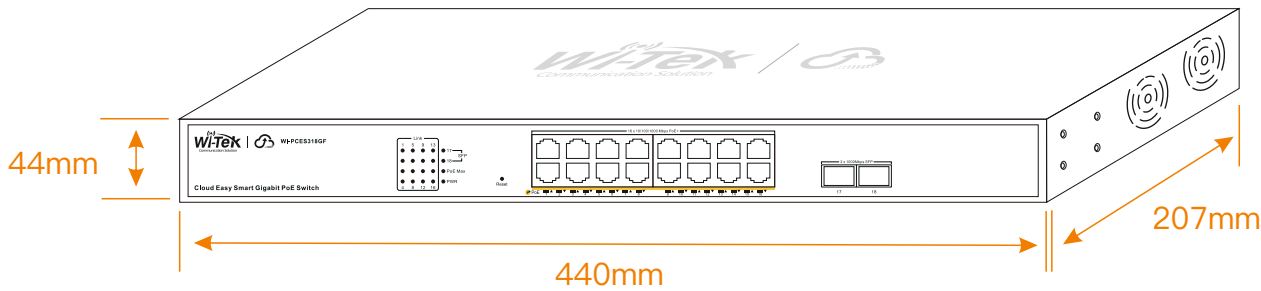

Front Panel

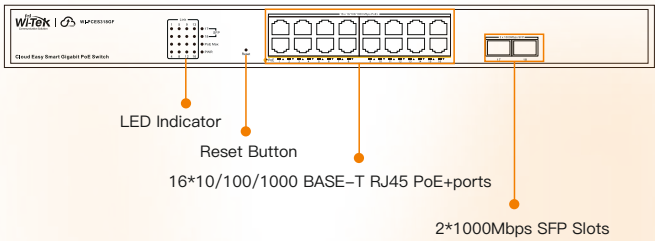


Side Panel

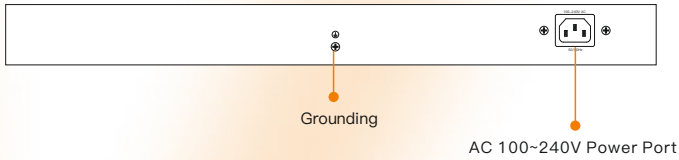


WI-PCES326GF


Dimensions (mm)

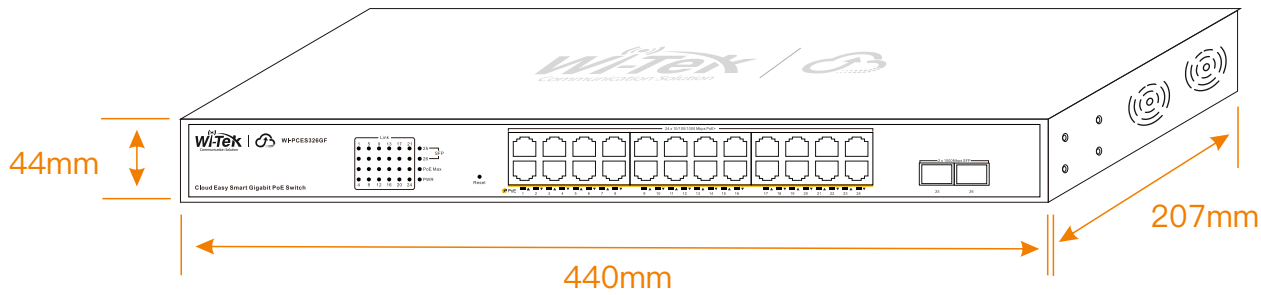

Front Panel

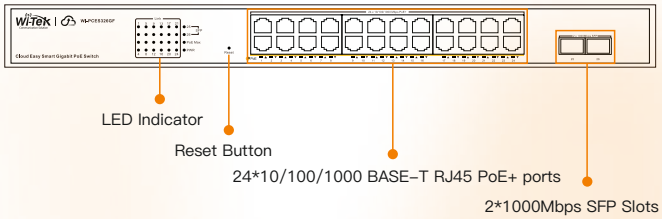

Side Panel

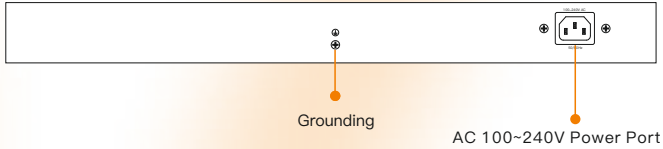

Package Contents

Welcome to order our products. After purchasing, you will receive:

WI-PCES306G

Items	Quantity
Switch	1 pcs
Quick Installation Guide	1 pcs
Power Cord	1 pcs
Mounting Accessories	Mat x 4

WI-PCES310GF/WI-PCES318GF/WI-PCES326GF

Items	Quantity
Switch	1 pcs
Quick Installation Guide	1 pcs
Power Cord	1 pcs
Mounting Accessories	Hook x 2, Mat x 4, Screw x 8



Wireless-Tek Technology Limited

Address: Building 3, Units 1801-1807, 1812, Huaqiang Era Plaza, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen City, Guangdong Province, China.

Website: www.wireless-tek.com

Tel: 86-0755-32811290

Email: sales@wireless-tek.com

Technical Support: tech@wireless-tek.com



Technical Support



Cloud Management



Company Website