


## DM938T

## 7" Smart Tuya Background Music Amplifier

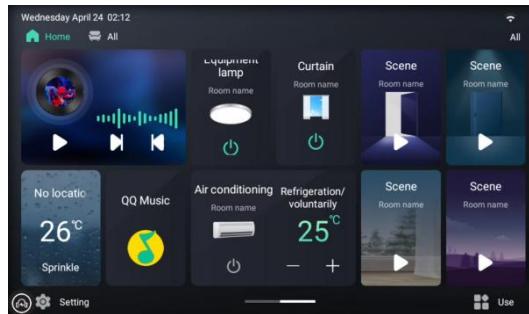

## Description

Our smart background music amplifier adopts a 7" TFT digital HD screen (1024 × 600 HD resolution), and supports multi-point capacitive touch, with 4-core 2G running processor and Android 8.1 system for the main chip. The unit holds 2GB RAM and 8GB ROM. It supports DLNA, Airplay, Qplay and other protocols. It has WIFI, Bluetooth, and timing power-on/off, and supports LAN multi-zone control and intercom function.

## Features

- Support LAN multi-zone control and intercom function.
- Support 4-channel speaker output and 2-zone volume control.
- Support DLNA, Airplay, Qplay and other protocols, and can push music, videos, pictures, files, and apps from the mobile phone to the host for playback or installation.
- Support mobile devices to push music via Bluetooth.
- Support external devices to control the machine via 485.
- Support audio input and output functions.
- Support TF card and 2.0 USB interface, which can be attached to a hard disk.

## Specifications

Model	DM938T
Power Input	AC90-250V
Output Power	4*10W
Music Power	4*20W
Output Impedance	8Ω
Display Screen	7" TFT digital HD screen
Operating System	Android 8.1
Memory	2+8G
Audio Input (AUX)	1 group
Audio Output	1 group
WIFI Audio Push	Support
Bluetooth Audio Push	Support


Cable Box Cut-Out Size

172\*86\*57mm

Product Dimensions

180\*112mm

## Front / Rear Panel

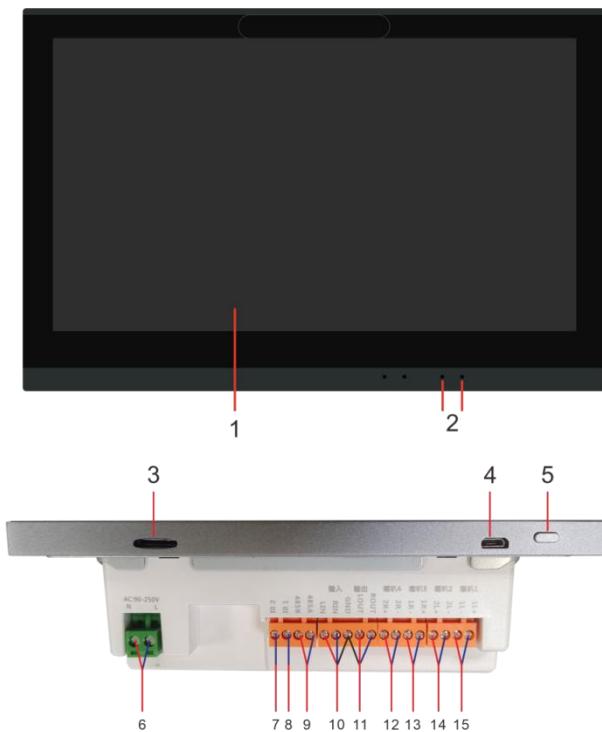

1. Display screen.
2. Digital microphone.
3. TF card slot: Insert a TF card into the slot with the notch to the right, up to 32G capacity.
4. Mini USB port: Mini USB socket: Can connect a standard 1.1, 2.0 USB flash disk through a connector, which can support a maximum capacity of 32G.
5. Power button: Press and hold the button for 3 seconds to power it on, and press and hold the button for 3 seconds to power it off when it is powered on; short press the button to enter sleep, and short press the button again to wake it up.
6. Power input cable: Two copper core wires, with a single core of 0.75 square or more.
7. Reversed I/O interface.
8. Reversed I/O interface.
9. 485 control cable: Two copper core wires, with a single core of 0.75 square or more.
10. AUX audio input: Audio cable (two-core shielded cable: commonly known as microphone cable), RVVP2X0.5, RVVP2X0.75.
11. Audio output: Coaxial cable (one-core shielded cable: commonly known as coaxial cable).
12. Constant-resistance ceiling speaker: Can connect 8Ω 10W constant-resistance ceiling speaker.
13. Constant-resistance ceiling speaker: Can connect 8Ω 10W constant-resistance ceiling speaker.
14. Constant-resistance ceiling speaker: Can connect 8Ω 10W constant-resistance ceiling speaker.
15. Constant-resistance ceiling speaker: Can connect 8Ω 10W constant-resistance ceiling speaker.